

Exit Plus

- Direct illumination of Exit door and immediate escape route area.
- Available as a 'Self Test' luminaire.
- Compatible with the AL255 and DL500 Addressable Emergency Lighting System.
- Fewer luminaires required, reducing installation costs.
- The legend is screen printed onto a polycarbonate inner plate for improved quality and clarity.



The Exitplus has been specifically designed to provide a clearly defined and unambiguous indication of the escape route from a building during mains failure, in accordance with BS5266 part 1, 1988.


The luminaire additionally provides excellent downlight to illuminate the exit door and escape route area around the luminaire.

The exit sign legend is screen printed onto a polycarbonate inner plate for improved quality and clarity. The legend panel is secured to the inside of the diffuser to avoid damage to the fascia. A range of legends are available for use with the Exitplus.

- Combined illuminated 'Exit' plus 'Emergency Lighting' luminaire.
- Cable entry via BESA in rear and 20mm top entry.
- Moulded clear polycarbonate diffuser with white body.
- High quality screen printed 'Euro' exit legend, mounted behind the diffuser for added protection.
- Manufactured to EN60598:2.22


Technical Specification

Dimensions (mm)

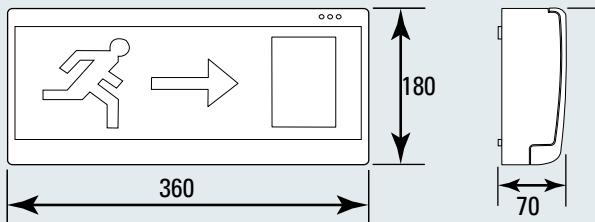

EMERGENCY SELF CONTAINED LUMINAIRES					
Stock Code	Sales Order Code	Mode	Normal Lamp Output	Weight	Source Watts
69-080-20	EP/NM3	NM	N/A	1.8Kg	8W
69-090-30	EP/M3	M	400 Lumen	1.8Kg	8W
Mode NM = Non Maintained M = Maintained					
Input Voltage	230v +/- 10% 50 Hz				
Input Current	25mA - Non Maintained, 175mA - Maintained				
Emergency Duration	3 Hours				
Environment	0°C to 25°C				
Lamp Type	8 Watt				

Maximum Viewing Distance

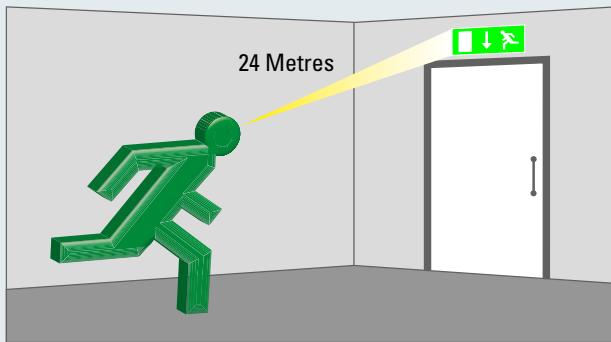

EMERGENCY CENTRAL BATTERY LUMINAIRES				
Stock Code	Sales Order Code	Central Battery Power Input	Source Watts	
		AC(VA)	DC (WATTS)	
69-100-40	EP/24	10.5	10.5	8W
69-110-50	EP/50	11.5	11.5	8W
69-120-60	EP/110	10	10	8W

EMERGENCY MAINS ONLY LUMINAIRES				
Stock Code	Sales Order Code	Input Watts Without PFC	Input Watts with PFC	Source Watts
69-130-70	EP/240	38	15	8W
Input Voltage 220/240v 50HZ. Suffix /PFC for power factor correction to 0.85				

Exit Legends

Order Code	Legend	Description
EP/715		Progress forward from here (indicating direction of travel) / Progress forward and up from here (indicating change of level)
EP/716		Progress forward from here (indicating direction of travel) / Progress down from here (indicating change of level)
EP/703		Progress to the left from here (indicating direction of travel)
EP/704		Progress to the right from here (indicating direction of travel)
EP/ISO/UP		Progress forward from here (indicating direction of travel) / Progress forward and through from here, when sign is sited above a door (indicating direction of travel) / Progress forward and up from here (indicating change of level)
EP/ISO/DOWN		Progress down from here (indicating change of level)
EP/ISO/LEFT		Progress to the left from here (indicating direction of travel)
EP/ISO/RIGHT		Progress to the right from here (indicating direction of travel)