

10 Watt ABS Horn Loudspeaker

- Excellent Voice Reproduction
- Suitable for Industrial Environments
- Ideal for Covering Large Areas
- ABS Moulding with UV inhibitors




This waterproof plastic re-entrant horn speaker has been developed for clear speech reproduction. This unit is rated at 10 Watts.


The speaker is supplied complete with a fixed lead cable, allowing connection to a junction box on the field cabling system. This unit is suitable for internal and external use, delivering excellent speech quality to these areas.

Dimensions (mm)

Side View




Front View

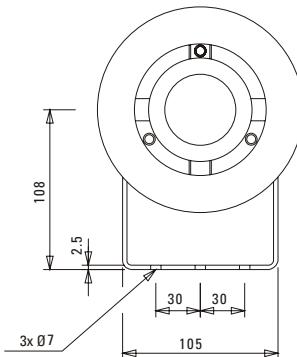

Technical Specification

Circuit Diagram

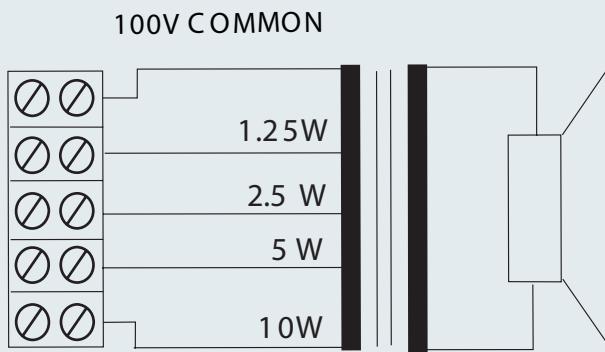

Technical Specification:

Power Handling:	10 watts
Rated Input	100 volt
Transformer Tappings	10, 5, 2.5, 1.25 watts
SPL (1w/1m)	97dB
Max SPL (rated/1m)	107dB
Frequency Response	380Hz – 9kHz
Dispersion at 1k/4kHz	180° / 45°
Dimensions (diameter x depth)	138mm x 200mm
Material	ABS Plastic
Weight (inc. packaging)	1.7kg
Colour	Grey RAL 7035
IP Rating	66
Stock Code	200-004-06

Frequency Response

