

- Three detection zones as standard
- Configurable detection delays
- Compatable with I.S barriers
- Configurable first stage sounder delays
- Zero time delay upon manual release option
- Countdown timer shows time remaining until release
- Supports upto seven, four wire status indicators
- Built in extract fan control
- Approved to EN12094-1, EN54-2 and EN54-4

Sigma XT Extinguisher Control Panel



Designed and manufactured to the highest standards in a quality controlled environment and with European EN12094-1 approvals, the Sigma XT extinguisher releasing panel offers outstanding value and performance for all small to medium fixed firefighting installations.

With three detection zones as standard, extinguisher release can be configured to activate from any combination of detection zone inputs to allow (among other combinations) any two from three type activations such as would be required for detection in ceiling void, room and floor void applications.

The extensive configuration options of the Sigma XT allow the functionality of the system to be extensively modified while still complying with the requirements of the controlling standard for the equipment (EN12094-1, EN54-2 and EN54-4).

The panel contains a large LED display to enable easy configuration and control which also displays the time remaining until extinguisher release for added user safety.


The countdown timer is duplicated on up to seven remote status units to provide local indication of the extinguisher system status.

With all of the electronics mounted on a single, easily removable, steel plate Sigma XT panels are both robust and easy to install.

For compatible status units see Sigma Status Indicator data sheet MED2196.

Technical Specification

Wiring Diagram

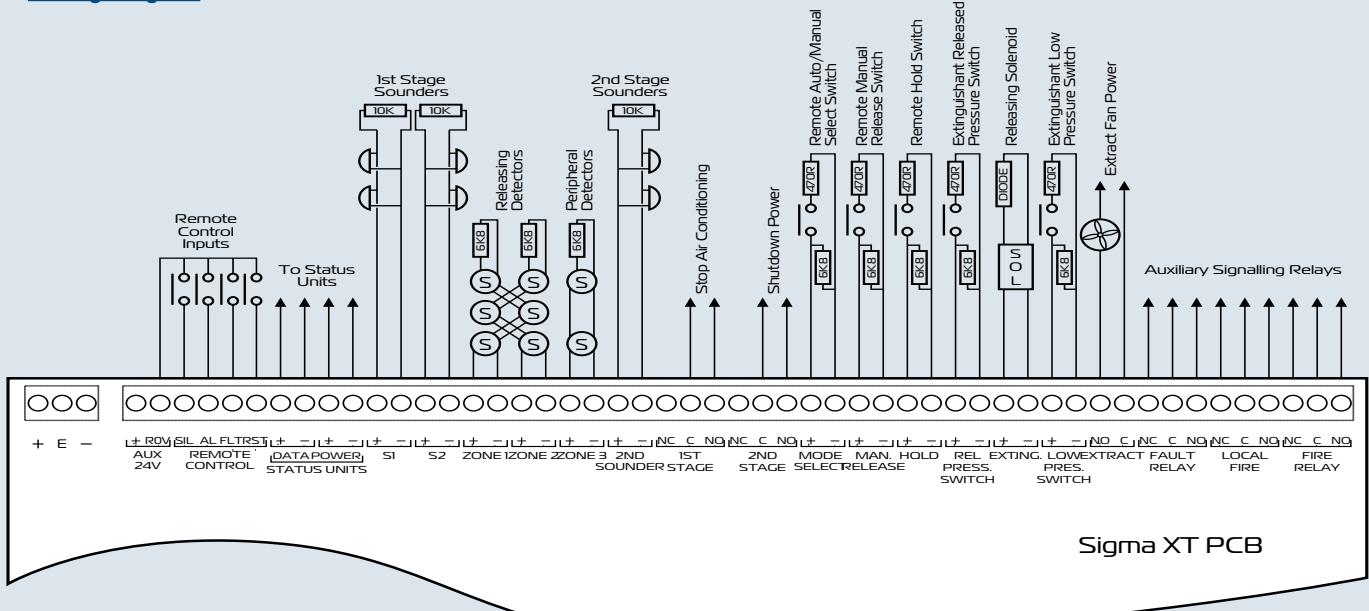

Sigma XT PCB

Programmable Functions

Access Level 2

- Test Zones 1 to 3
- Disable Zones 1 to 3
- Disable 1st Stage Alarms
- Disable Pre-activated 1st Stage Relay
- Disable Pre-activated 2nd Stage Relay
- Disable Extract Fan Output
- Disable Manual Release Input
- Disable Extinguisher Sub System
- Activate Extract Fan Output
- Activate Alarm Delays

Access Level 3

- Sounder Delay
- Coincidence Detection
- Disable Panel Features
- Zone Alarm Delays (Detectors)
- Zone Alarm Delay (Call Points)
- Configure Zone for I.S Barrier Use
- Zone Short Circuit Alarm
- Zone Non Latching
- Zone Inputs Delay
- Extinguisher Release Time Delay
- Extinguisher Release Duration Timer
- Extinguisher Reset Delay Timer

Order Codes

SIGMA XT/S Extinguisher Control Panel 3 Zone 1 Area - Surface

Note: Special finish flushing collars for surface enclosures are available on request

Technical Specification

| | |
|---|---|
| Construction | - 1.2mm mild sheet steel |
| IP Rating | - IP30 |
| Finish | - Epoxy powder coated |
| Colour - lid & box | - BS 00 A 05 grey - fine texture |
| Colour - controls plate & labels | - RAL 7047 light grey - satin |
| Weight | - 6kg |
| Mains supply | - 230V AC +/-10%/-15% (100 Watts maximum) |
| Mains supply fuse | - 1.6 Amp (F1.6A L250V) |
| Power supply rating | - 3 Amps total including battery charge 28V +/- 2V |
| Maximum ripple current | - 200 millivolts |
| Battery type (Yuasa NP) | - Two 12 Volt 7Ah sealed lead acid in series |
| Battery charge voltage | - 27.6VDC nominal (temperature compensated) |
| Battery charge current | - 0.7A maximum |
| Battery fuse | - 20mm, 3.15A glass |
| Maximum current draw from batteries | - 3 Amps |
| Quiescent current of panel in mains fail | - 0.095A |
| ROV output | - Fused at 500mA with electronic fuse |
| Sounder outputs | - 24V Fused at 500mA with electronic fuse |
| Fault relay contact rating | - 30VDC 1A Amp maximum |
| Fire relay contact rating | - 30VDC 1A Amp maximum |
| Local fire relay contact rating | - 30VDC 1A Amp maximum |
| First stage contact rating | - 30VDC 1A Amp maximum |
| Second stage contact rating | - 30VDC 1A Amp maximum |
| Extract contact rating | - 30VDC 1A Amp maximum |
| Zone quiescent current | - 2mA maximum |
| Terminal capacity | - 0.5mm ² to 2.5mm ² solid or stranded wire |
| Number of detectors per zone | - Dependent on type (maximum 32) |
| Number of sounders per circuit | - Dependent on type (max. 0.5A per sounder circuit) |
| Detection circuit end of line | - 6K8 5% 1/2 Watt resistor |
| Monitored input end of line | - 6K8 5% 1/2 Watt resistor |
| Sounder circuit end of line | - 10K 5% 1/4 Watt resistor |
| Extinguisher output EOL | - 1N4004 Diode |
| No. of detection circuits | - 3 |
| No. of sounder circuits | - 2 x 1st Stage, 1 x 2nd Stage |
| Extinguisher release output | - Fused at 1 Amp |
| Extinguisher release delay | - Adjustable 0 to 60 seconds (in 5 second steps) |
| Extinguisher release duration | - Adjustable 60 to 300 seconds (in 5 second steps) |
| SIL, AL, FLT, RST inputs | - Switched -ve, max resistance 100 Ohms |
| Zone normal threshold | - 8K ohms to 1K ohm |
| Detector alarm threshold | - 999 ohms to 400 ohms |
| Call point alarm threshold | - 399 ohms to 100 ohms |
| Short circuit threshold | - 99 ohms to 0 ohms |
| Head removal condition | - 15.5 to 17.5 volts |
| Cabling | - FP200 or equivalent |
| Monitored inputs normal threshold | - 8K ohms to 1K ohm |
| Monitored inputs alarm threshold | - 999 ohms to 100 ohms |
| Monitored inputs Short circuit threshold | - 99 ohms to 0 ohms |
| Status unit/Ancillary board connection | - Two wire RS485 connection |
| Status unit power output | - Fused at 500mA with electronic fuse |
| Dimensions (mm) | - 385(W) x 310(H) x 90(D) |