

10 Watt ABS Horn Projector - EN54-24



- Excellent Voice Reproduction
- Suitable for Industrial Environments
- Ideal for Covering Large Areas
- Fully Compliant with EN54-24
- Cert No: 0359-CPD-0166 Type B



This waterproof plastic re-entrant horn speaker has been developed for clear speech reproduction. This unit is rated at 10 Watts.


The speaker is supplied complete with a fixed lead cable, allowing connection to a junction box on the field cabling system. This unit is suitable for internal and external use, delivering excellent speech quality to these areas.

Dimensions (mm)

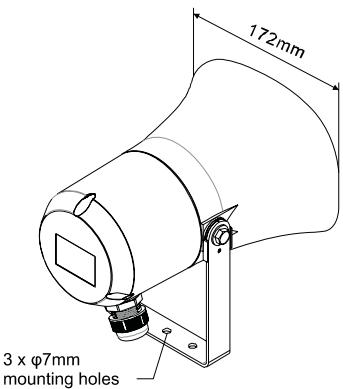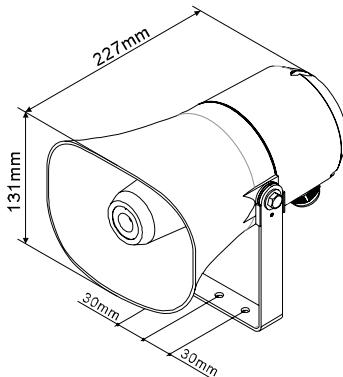

Technical Specification

Circuit Diagram

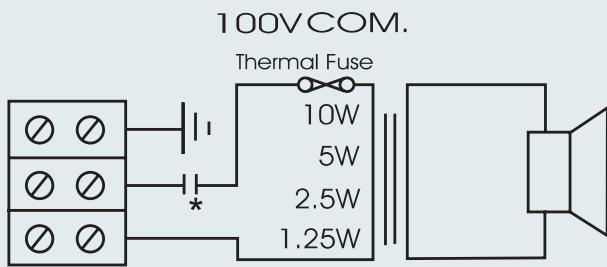


* with capacitor

Technical Specification:

Power Handling	10 watts
Rated Input	100 volt
Transformer Tappings	10, 5, 2.5, 1.25 watts
SPL (1w/1m)	105dB*
Max SPL (rated/1m)	115dB*
Frequency Response	340Hz – 16kHz
Dispersion at 1k/2kHz	139° / 74° Horizontal 173° / 96° Vertical
Dimensions (W x H x D)	172mm x 131mm x 227mm
Material	ABS Plastic
Weight (inc. packaging)	1.6kg
Colour	Grey RAL 7035
IP Rating	66
Stock Code	200-250-11-CEN

*Test Signal Bandwidth 100Hz - 10kHz

Frequency Response

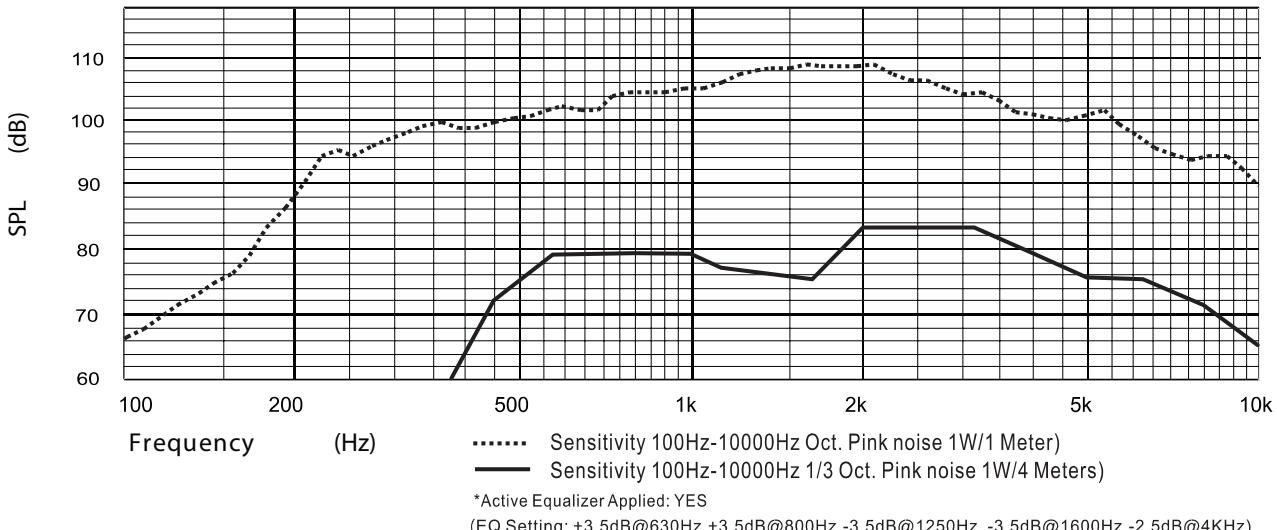

Protec
Protec Fire Detection plc