

20 Watt Co-Axial Ceiling Loudspeaker - EN54-24

- Steel Fire Dome
- 150°C Thermal Fuse
- Ceramic Terminal Block
- Fully Compliant with EN54-24
- Cert No: 0359-CPD-0120 Type A




20 Watt, flush mount ceiling speaker with innovative fitting system for fast and simple installation.

This loudspeaker has been carefully designed to satisfy the most critical eye. This unit is stylish yet unobtrusive and is supplied with firedome.

It employs a two-way speaker system comprising a bass mid-range driver and separate tweeter. The bass response has been extended to give depth and warmth to both music and vocals. This drive unit has been carefully tailored to give an exceptionally smooth performance whilst still maintaining an unusually high sensitivity for this type of loudspeaker.


Dimensions (mm)

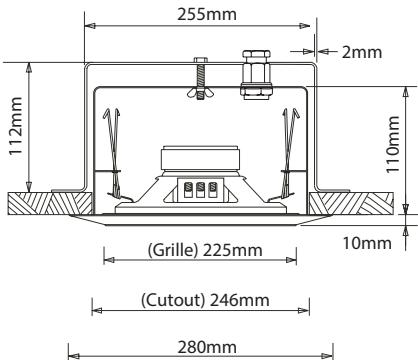

Technical Specification

Polar Pattern

* unit fitted with Capacitor

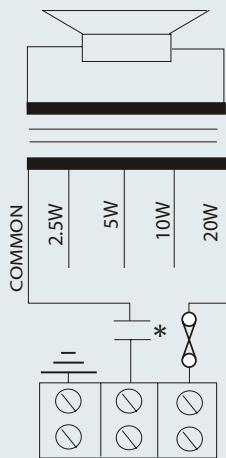

Technical Specification:

Power Handling	20 watts
Rated Input	100 volt
Transformer Tappings	20, 10, 5, 2.5 watts
SPL (1w/1m)	94dB*
Max SPL (rated/1m)	107dB*
Frequency Response	100Hz – 20kHz
Dispersion at 1k/2kHz	180° / 180°
Dimensions (diameter x depth)	280mm x 126mm
Cutout Size (diameter)	246mm
Material	Steel
Weight (inc. packaging)	2.93 kg
Colour	White RAL9016
Stock Code	200-064-20-CEN

*Test Signal Bandwidth 100Hz - 10kHz

Frequency Range

