

20 Watt Metal Column Loudspeaker - EN54-24

- Thermal Fuse
- Ceramic Terminal Block
- External Variable Tapping Selection
- Complies with EN54-24
- Cert No: 0359-CPD-0165 Type B




This metal column loudspeaker offers a combination of elegant styling, robust construction and high performance. The enclosure is tuned to give a wide frequency range not normally associated with column loudspeakers and as such, produces high quality music and speech reproduction.


Ideally suited for use in airports, churches, factories, sports and conference centres.

Available in 20 watt version, this units offer external variable tapping selection and 20mm cable gland entry.

Dimensions (mm)




Top and Bottom View

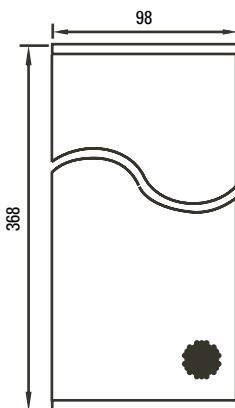

Front View

Technical Specification

Circuit Diagram

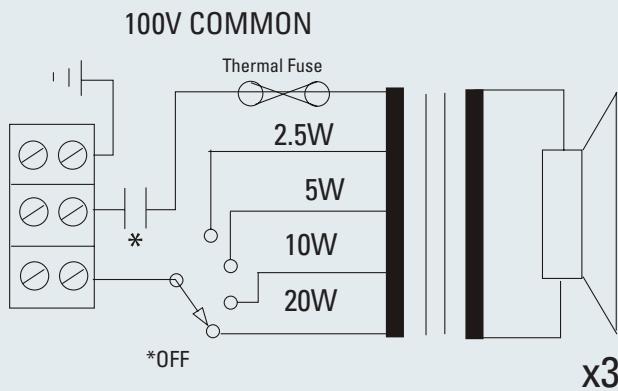


Technical Specification:

Power Handling	20 watts
Rated Input	100 volt
Transformer Tappings	20, 10, 5, 2.5 watts
SPL (1w/1m)	92dB*
Max SPL (rated/1m)	105dB*
Frequency Response	170Hz – 17kHz
Dispersion at 1k/2k Hz	180° / 150° Horizontal 110° / 60° Vertical
Dimensions (H x W x D)	368mm x 98mm x 90mm
Material	Aluminium
Weight (inc. packaging)	2.5 kg
Colour	White RAL9016
Stock Code	200-061-17-CEN

*Test Signal Bandwidth 100Hz - 10kHz

Frequency Response

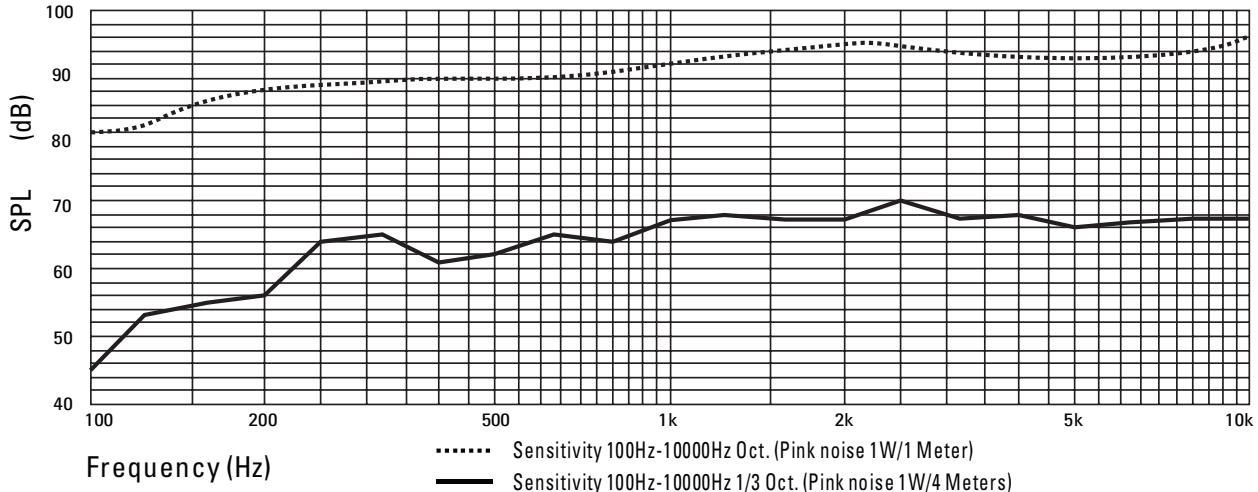

*Active Equalizer Applied: NO