

20 Watt Co-Axial Ceiling Loudspeaker

- 2 Way Speaker System
- Extended Bass Response
- Suitable for Paging & Background Music
- Excellent Frequency Response
- Ceiling Cutout Template Provided




8", flush mount ceiling speaker with innovative fitting system for fast and simple installation.

This loudspeaker has been carefully designed to satisfy the most critical eye. This unit is stylish yet unobtrusive and is supplied without a firedome.


It employs a two-way speaker system comprising a bass mid-range driver and separate tweeter. The bass response has been extended to give depth and warmth to both music and vocals. This drive unit has been carefully tailored to give an exceptionally smooth performance whilst still maintaining an unusually high sensitivity for this type of loudspeaker.

Dimensions (mm)

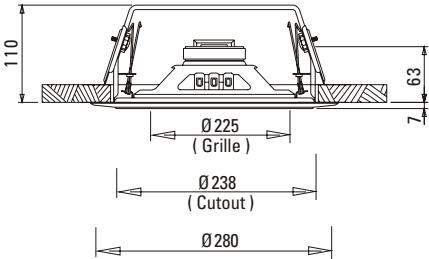

Technical Specification

Circuit Diagram

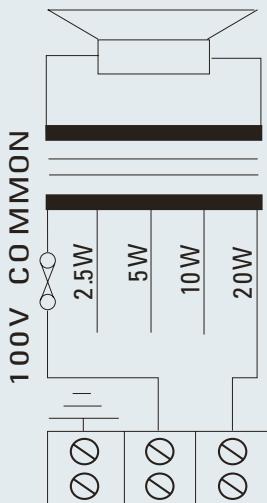

Technical Specification:

Power Handling	20 watts
Rated Input	100 volt
Transformer Tappings	20, 10, 5, 2.5 watts
SPL (1w/1m)	91dB
Max SPL (rated/1m)	104dB
Frequency Response	60Hz – 20kHz
Dimensions (diameter x depth)	280mm x 110mm
Cutout Size (diameter)	240mm
Material	Steel
Weight (inc. packaging)	1.85 kg
Colour	White RAL9016
Stock Code	200-064-20

Frequency Range

