


## 4 Watt Surface Mount Speaker - EN54-24

- LSOH UL-94V0 Plastic with UV inhibitors
- 150°C Thermal Fuse
- Ceramic Terminal Block
- Fully Compliant with EN54-24
- Cert No: 0359-CPD-0148 Type B



### 4 Watt Surface Mount Speaker

#### Dimensions (mm)

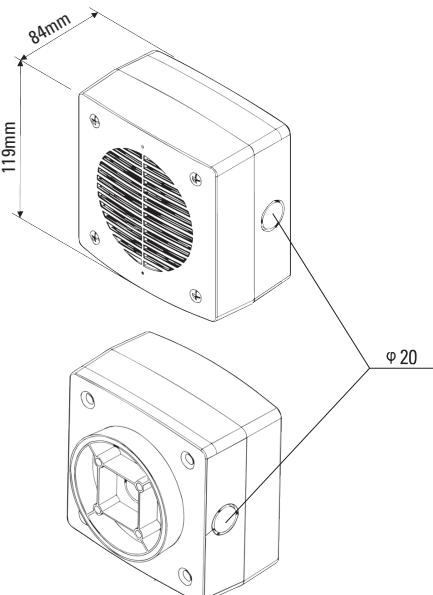


This cabinet loudspeaker can be installed on solid ceilings or walls.

Supplied with dual gland entries, which give the installer the option of loop in loop out termination thus avoiding the need for a separate junction box, this cabinet is both robust and aesthetically pleasing. Although our standard finish is White, RAL9016, alternative finishes are available upon request.

This cabinet loudspeaker offers a wide frequency range suitable for both speech and background music applications.

# Technical Specification

## Circuit Diagram

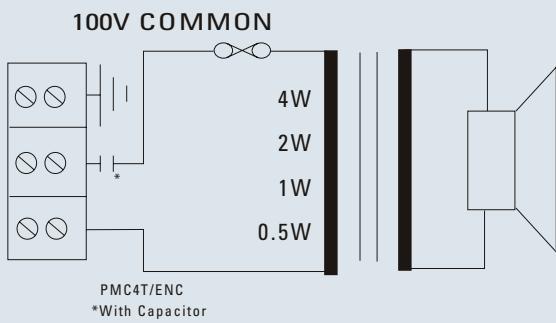

## Technical Specification:

Power Handling:	4 watts
Rated Input:	100 volt
SPL (1w/1m):	91dB*
Max SPL (rated/1m):	97dB*
Frequency Response:	120Hz – 18kHz
Dispersion at 1k/2k Hz:	136° / 109° Horizontal 138° / 110° Vertical
Dimensions (diameter x depth):	119mm x 119mm x 84mm
Material:	Low smoke zero halogen UL-94V0 Plastic with UV inhibitors
IP Rating:	IP56
Weight (inc. packaging):	1.0kg
Colour:	White RAL9016
Stock Code:	SP1504

\*Test Signal Bandwidth 100Hz - 10kHz

## Frequency Response

