

## Moulded Cabinet Bi-Directional Loudspeaker

- **Moulded Cabinet Bi-Directional Loudspeaker**

- **Ideal for Speech & Music**

- **Wall / Ceiling Mounting**

- **Ideal for Use in Corridors**

- **Fully Compliant With EN54-24**





This bi-directional cabinet loudspeaker is constructed from LSOH plastic and can be installed on solid ceilings or walls. Supplied with dual gland entries, which give the installer the option of loop in loop out termination thus avoiding the need for a separate junction box, this cabinet is both robust and aesthetically pleasing. Although our standard finish is White, RAL9016, alternative finishes are available upon request.

This Bi-Directional unit contains dual cone loudspeakers offering a wide frequency range suitable for both speech and music applications.


This unit is manufactured and certified to EN54-24.

### Dimensions (mm)



# Technical Specification

## Circuit Diagram

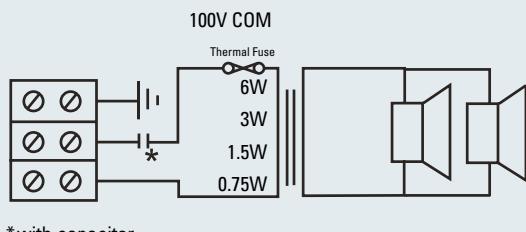

## Technical Specification:

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75 watts
SPL (1w/1m)	88dB
Max SPL (rated/1m)	96dB
Frequency Response	110Hz – 18kHz
Dispersion @ 1K/2kHz	290° / 260°
Dimensions (width x height x depth)	246 x 116 x 100mm
Material	Moulded Plastic
Weight (inc. packaging)	1.3kg
Colour	White RAL9016
Stock Code	200-139-00

## Frequency Range

