

- Cloud Chamber Detection Principle
- Up to 200 mtrs Sampling Pipe
- Programmable 'Pre-Alarm' warning condition
- 3 Programmable 'Fire' warning conditions
- Multi-function Display and Programmer
- 'Alarm' action text
- Vast Sensitivity Range (incipient to conflagrating)
- Latching / non latching alarm contacts
- Airflow Monitoring
- 'Fault Diagnostic' feature
- Immune to dust, humidity & temperature changes

Cirrus Pro 200DSC



CLOUD CHAMBER FIRE DETECTOR

The 'sensitivity range' is the key feature that makes the Cirrus Pro Series Fire Detector the world's most versatile fire detection device.

For over 20 years Cloud Chamber detectors have been known as the most sensitive fire detection device, able to detect at the true incipient stage of a developing fire.

The New Cirrus Pro Series Detectors have a vast sensitivity range capable of being even more sensitive than previous versions. In addition the detector may now be configured to be installed in heavily contaminated environments, such as polluted production and warehousing facilities.

ALMOST UNLIMITED APPLICATIONS


High Sensitivity Applications include:- Computer Rooms, Clean Rooms, Control Rooms, Data Centres, Valve Halls, Archive Storage, Anechoic Chambers, EDP areas.

General Sensitivity Applications include:- Historic Buildings, Museums, Hospitals, Cathedrals, Theatres, Art Galleries, Clean Warehouses, Atria, Indoor Stadiums.


Harsh Environment Applications include:- Cold Storage Facilities, Specialist Production Facilities, Food Industry Facilities, Paper Production Facilities, Transportation Terminals, Flight Simulators, Aircraft Hangers, Prisons, Inaccessible Voids, Dirty Warehouses.

Technical Specification

Connections

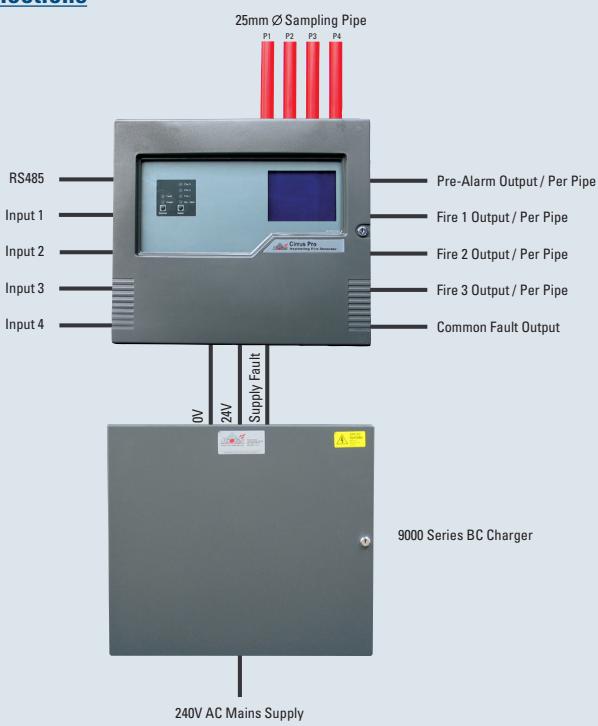

Dimensions (mm)

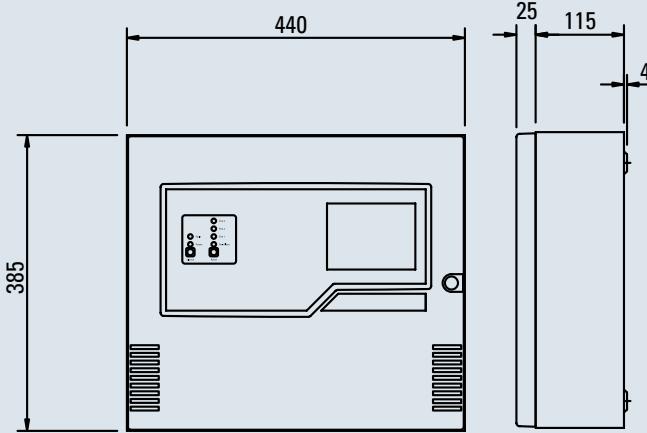

Technical Specification:

Supply Voltage	20 - 29VDC	Sensitivity Range	20,000 particles per cc to 3 million particles per cc 10 programmable sensitivity ranges.
Power Consumption	14 watts in alarm		
Current Consumption	550mA quiescent 700mA alarm	Programmable Inputs	4 monitored inputs that may be configured for Isolate, Reset, Disable, Fault, Gain Set, Battery Fault and Mains Fault.
Dimensions	(W) 440mm, (H) 385mm (D) 144mm	Programmable Output Relays	17 Relays rated 1A @ 30VDC (Volt-free change over contacts)
Weight	9kg (19.8lbs)	Event Log	128 events stored on FIFO basis
Operating Conditions		Data Retention	Approx 10 day historical graph.
Detector Ambient	0°C to 38°C (32°F to 100°F)	Variable Sensitivity Settings	7 day programmable settings with 3 time zones per day.
Tested to	0°C to 55°C (32°F to 131°F)		
Sampled Air	-20°C to 60°C (-4°F to 140°F)	Multi-function Display/ Programmer:	Cirrus Pro 200DSC incorporates a quarter VGA backlit LCD. In normal conditions the Date, Time, Detector Text and Particle Levels are all displayed. Alternatively any Fault, Pre-alarm or Fire conditions will be displayed. Event Logs, 'Historical' and 'Real Time' graphs may also be displayed. The LCD display is also used in conjunction with the programming keys to commission each unit without need for a computer link.
Humidity	10 - 95%RH, non-condensing		
IP Rating	IP30	Airflow Monitoring	High Airflow' and 'Low Airflow' fault monitoring.
Cable Access	20 x 20mm knock outs 4 x 22.5mm knockouts		
Cable Termination	Screw terminal blocks (0.2 - 2.5mm ² , 30 - 12AWG)		
Sampling Network	Four inlet ports with combined sampling pipe length up to 200m (650ft.) Maximum Transport Time allowed up to 120 seconds.		
Alarm Indications	Pipe 1: Pre-alarm, Fire 1, Fire 2, Fire 3. Pipe 2: Pre-alarm, Fire 1, Fire 2, Fire 3. Pipe 3: Pre-alarm, Fire 1, Fire 2, Fire 3. Pipe 4: Pre-alarm, Fire 1, Fire 2, Fire 3.		
Other Indications	Supply Healthy, General Fault.		