

- Low lifetime cost
- 5 Year Warranty
- Desk microphone and pre-formed loop in counter kit
- 2 independant inputs featuring 1 mic input and 1 switchable mic/line input
- Metal loss compensation
- All connections to a single face for installation convenience
- 12V DC or external AC power pack supplied as standard

CLD1 Compact Loop Driver



The CLD1 Compact Loop Driver is designed for counter systems and small area perimeter loop systems. Measuring only 128 x 74 x 35mm and with an output current of 2.4A RMS, the CLD1 is the smallest and highest performance amplifier in its class. Designed and built to Protec's high standards of reliability, and backed with a 5 year warranty, the CLD1 offers certainty of performance and the lowest lifetime cost available.

Audio quality is ensured with metal loss correction (MLC) combined with Protec's usual high standards of design. The CLD1 is designed for flexibility and convenience, featuring 2 separate microphone inputs with independent level controls, one of which can be configured as a line input.

All cable connections are made on a single face of the unit, adding flexibility and further simplifying installation.

Applications include:

- Ticket and service counters
- Retail counters
- Information kiosks
- Reception desks
- Interview rooms
- Small meeting rooms

Counter Loops


When supplied as a counter loop kit, the CLD1 comes with a desk microphone, a multi-turn preformed loop power supply and simple installation instructions.

The loop should be mounted vertically in accordance with the installation instructions. Other installation methods are also available.

The CLD1 in this application will project a field to the requirements of IEC60118-4 approximately 1m from the preformed loop.

Technical Specification

Dimensions (mm)

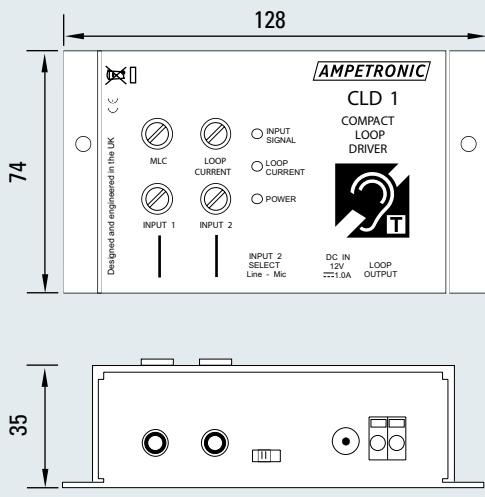

Technical Specification:

Inputs

Power	12V DC @ 1.0A max. Fuse fitted to PCB, type T 1.6A L Green LED Power indicator.
AC Power adapter	All integral 100-240v AC (CLD1/AC) 18W Max Regional plug also available
Input 1	Microphone input Suitable for unbalanced electret microphone 3.5mm mono jack socket Input impedance 8kΩ. 6V bias via 10kΩ source Sensitivity -60 dBu for max output Overload level -14 dBu. Recessed control on front panel
Input 2	Switchable line / microphone Recessed switch on connector panel Microphone as for input 1 Line input: Input impedance 820kΩ Sensitivity -20dBu for max output Overload: >+20dBu.

Outputs

Drive voltage	>3.2Vrms >4.5V peak at maximum output current
Drive current	2.4 Arms 3.4A peak continuous 1kHz sine wave Short term peak >4.8A peak LED indicator on front panel
Loop resistance	0.3Ω to 1.0Ω resistive or <1.3Ω maximum reactive
Loop connector	Vibration proof clamps, accept 0.5 to 1.3mm ²
Frequency response	80Hz to 6.3kHz ±1.5dB
Automatic gain control	AGC optimised for speech Dynamic range >36dB Green LED indicator on front panel
Metal loss correction	0 to 4.5dB/octave. Recessed control on front panel

Physical

Cooling	Natural convection
Dimensions	128mm, 74mm, 35mm
Environment	IP20 : 20 to 90% relative humidity, -20°C to 50°C
Mounting	Horizontal or vertical panel or wall mount, with 2 screw fixings

Desktop Microphone



The desk microphone EM195A is a directional unit providing good sound pickup with reduced ambient noise and reverberation. It has a weighted base for stability when used free standing, alternatively it can be fixed to the edge of an upright panel using the rotational mounting coupling included.

Colour:	Black
Cable length:	2 metres
Weight:	370 gram
Accessories:	Weighted Base Rotational mounting coupling

Materials and Images, courtesy of Ampetronic

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice
Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT